

Evo7SH

The Evo7SH is a mid-high skeletal loudspeaker offering very high output and controlled directivity. It can be used in a wide range of applications from use in demanding voice reinforcement applications or as the high power mid-high section of multi-way entertainment PA systems (for example with F215s and F221s/F124s). It has narrower dispersion with resulting higher intensity than the Evo6SH and the two products can be effectively combined to present even coverage and excellent intelligibility for arena and stadia installations.



* Shown with optional simple yoke

Features:

- Fully horn loaded for high efficiency
- Two-way (passive version available)
- Funktion-One designed drivers
- Low weight Neodymium magnets throughout
- Includes a choice of two stainless steel mounting yokes

Standard universal yoke allows full rotation around rear of Evo7SH.


An optional simple yoke alternative allows less rotation with flusher fitting

- Evo7EH version available in wooden enclosure

Driver	Operating Band**	Sensitivity (1W at 1m)	Power (rms***)	Nominal Impedance
10"	200 - 4kHz	108dB	250W	16Ω
1.4"	4kHz - up	109dB	75W	32Ω

** Please check website for latest crossover settings

*** AES rated

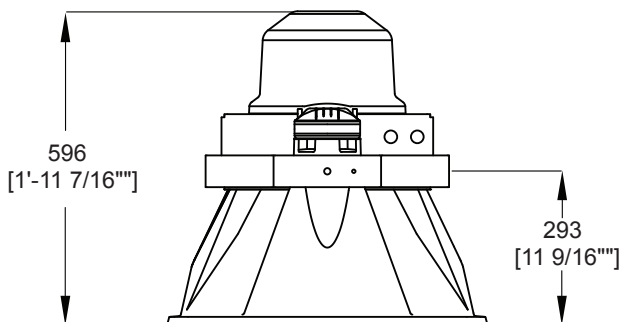

Frequency Response $\pm 3\text{dB}$:

200Hz - 18kHz

Weight:




23kg (51lbs)

Nominal Dispersion:

40° Horizontal x 20° Vertical

Connectors:

Speakon NL4

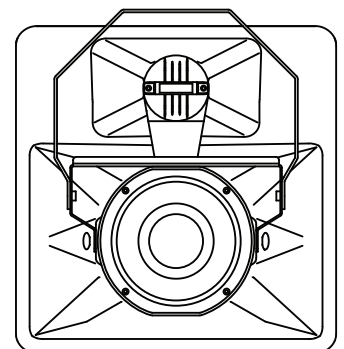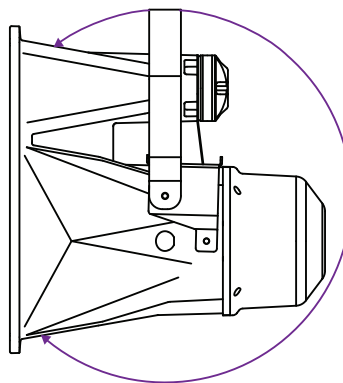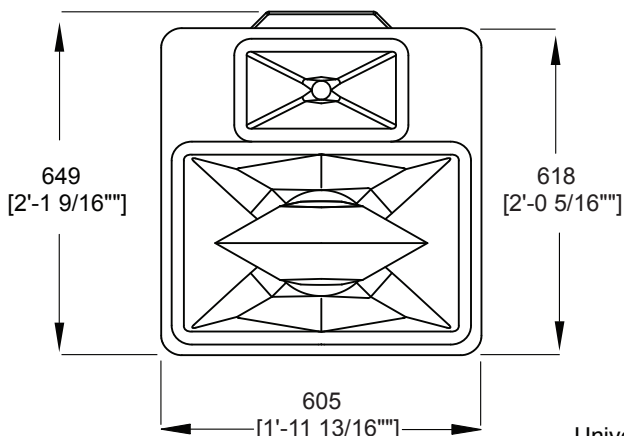


Universal yoke shown fitted as standard, allowing full rotation around rear of Evo7SH

* Optional simple yoke allows flusher fitting with less rotation

Evo 7 SH WITH UNIVERSAL YOKE

Universal yoke shown fitted as standard, allowing full rotation around rear of Evo7SH

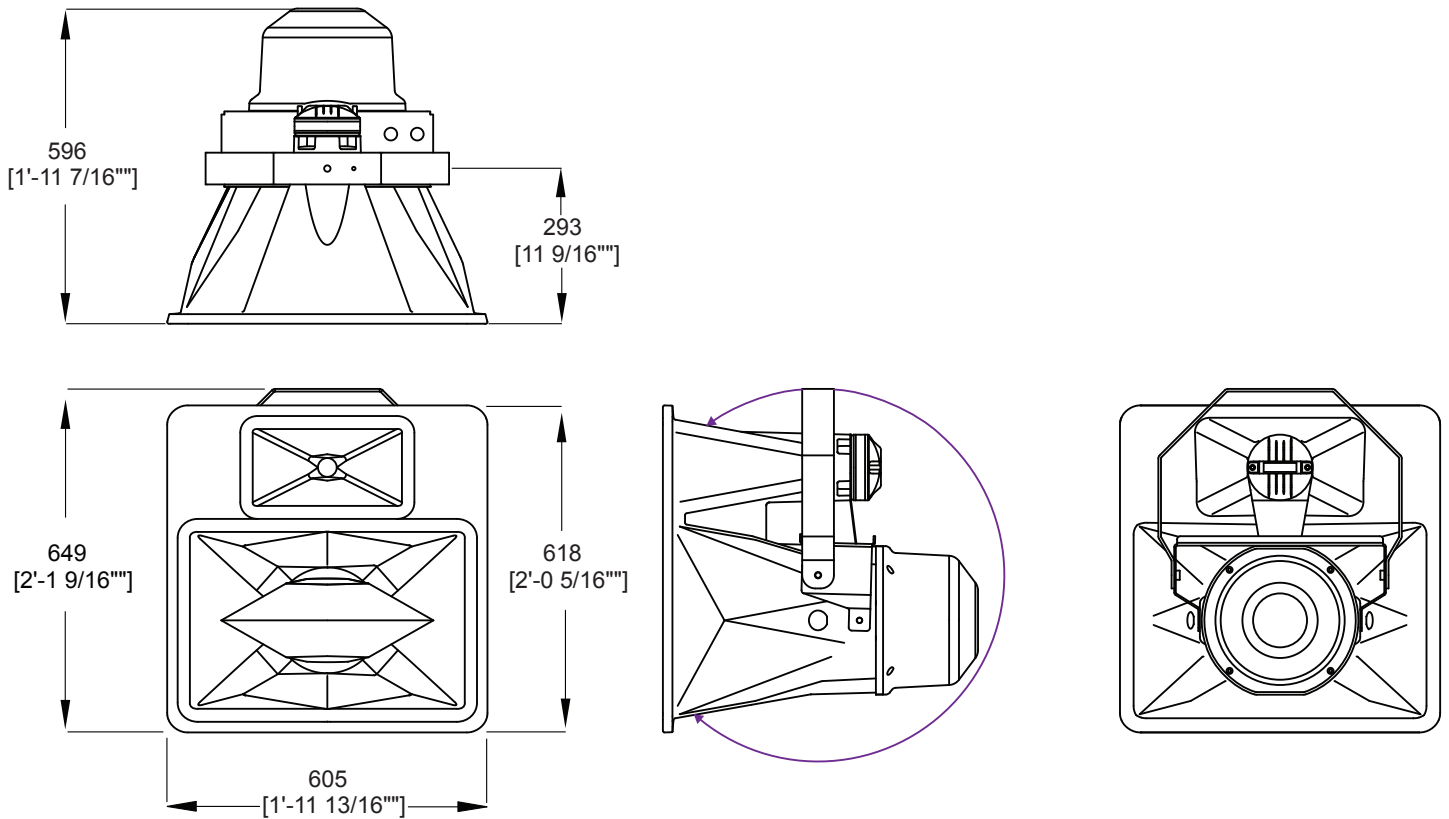

Evo 7 SH WITH SIMPLE YOKE

